

Grease separator *EasyClean free UnderSink* NS 0.7
for free-standing installation



The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms below a sink and is manufactured without the need for metallic components in the tank. The collecting tank made of permanently resistant polymer (PP) is equipped with an integrated sludge trap. An odour-tight cover with all-round seal and clip closures makes easy access possible for cleaning and maintenance work. For easy removal, the separator has a quick-release connection to the pipe.

An inspection window for optional installation on site is available for visual checking of the grease layer thickness.

Technical data:

- Inlet/outlet Ø 50 mm
- Grease storage 8l
- Sludge trap 12l
- Total volume 33l



Material: PP

Delivery: Modular kit for assembly on site

Type of disposal: manual



NS	Art. no.
0.7	93 070.00US

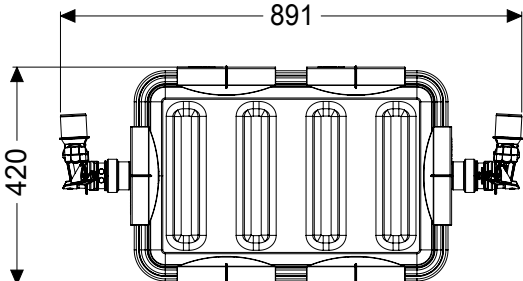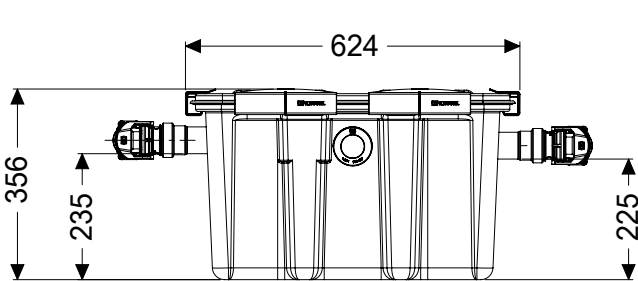

h1 (mm)	h2 (mm)	Inlet/outlet Ø (mm)	Installation dimension l × b (mm)	Weight (kg)	Sludge trap (l)	Water and grease (l)	Grease storage (l)	Total (l)
225	235	50	891 × 420	5	12	21	8	33

Accessories

Inspection window

Inspection window

Compatibility: For grease separators *EasyClean free UnderSink* for free-standing installation
Inclusive: High-gloss polished inspection glass
Note: Installation in drillhole on site, use hole saw with DA60







Art. no.
913 110

Fettabscheider *EasyClean free UnderSink*



Grease separator EasyClean free UnderSink • Séparateur à graisses EasyClean free UnderSink • Separatore di grassi EasyClean free UnderSink • Vetafscheider EasyClean free UnderSink • Separator tłuszczu EasyClean free UnderSink

Icon	Bedeutung / Meaning / Signification / Significato / Betekenis/ Znaczenie	Icon	Bedeutung / Meaning / Signification / Significato / Betekenis/ Znaczenie
	Lieferumfang / Scope of delivery / Détail de livraison / Dotazione / Leveringsomvang / Zakres dostawy		Einbau / Installation / Montage / Montaggio / Montage / Montaż
	Zubehör / Accessories / Accessoires / Accessori / Onderdelen / Osprzęt		Wartung / Maintenance / Maintenance / Manutenzione / Onderhoud / Konserwacja

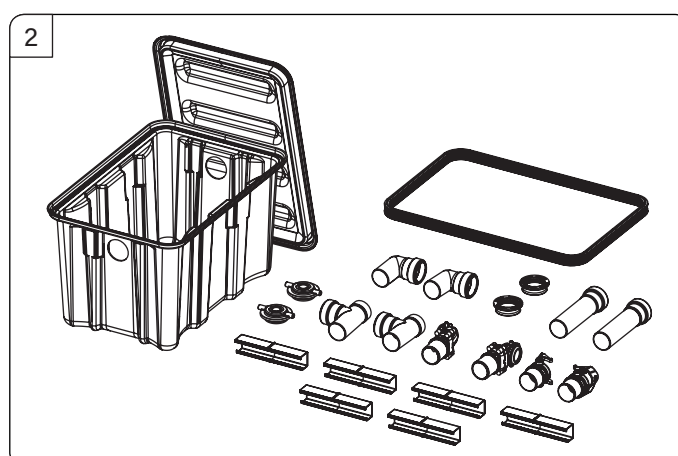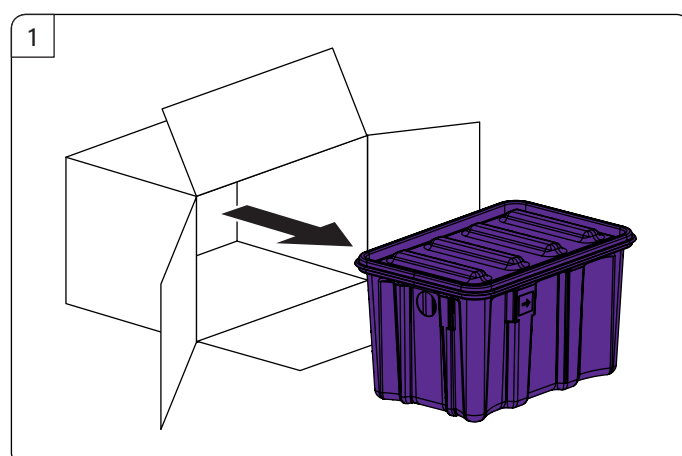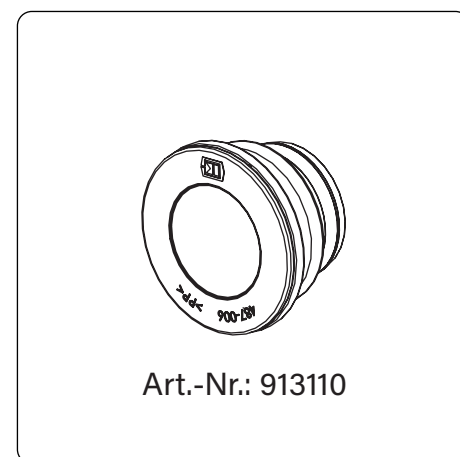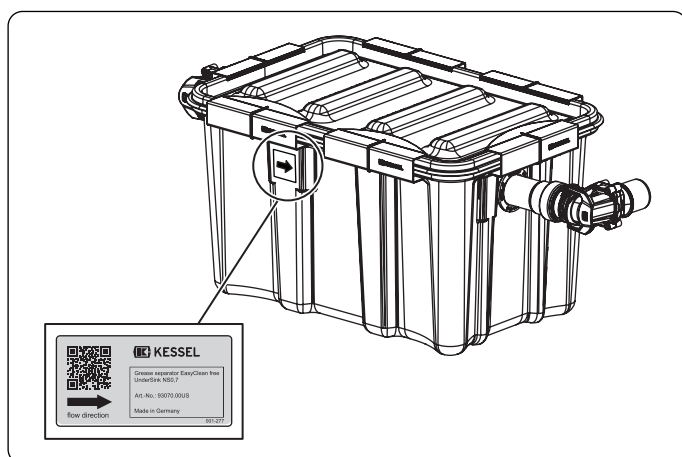

KESSEL AG








Bahnhofstraße 31 · 85101 Lenting

www.kessel.com

Technischer Kundendienst

Ihren Ansprechpartner vor Ort finden Sie

auf der KESSEL-Homepage: www.kessel.de/kundendienst

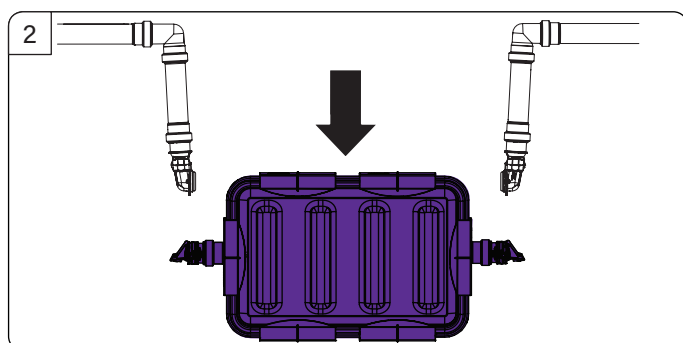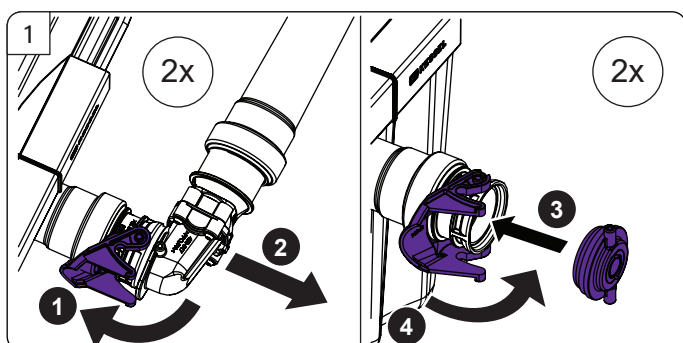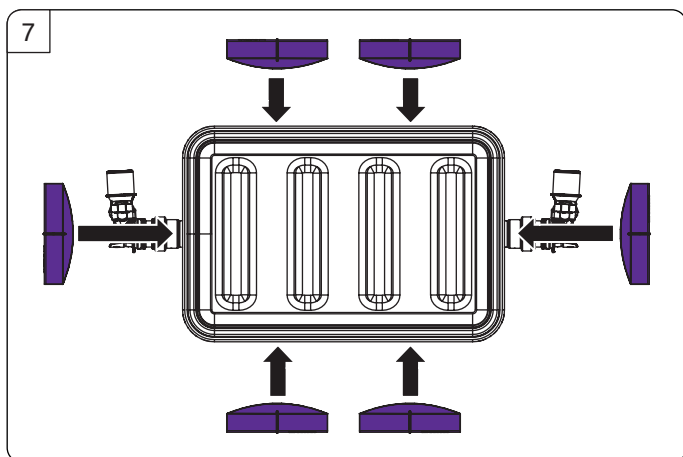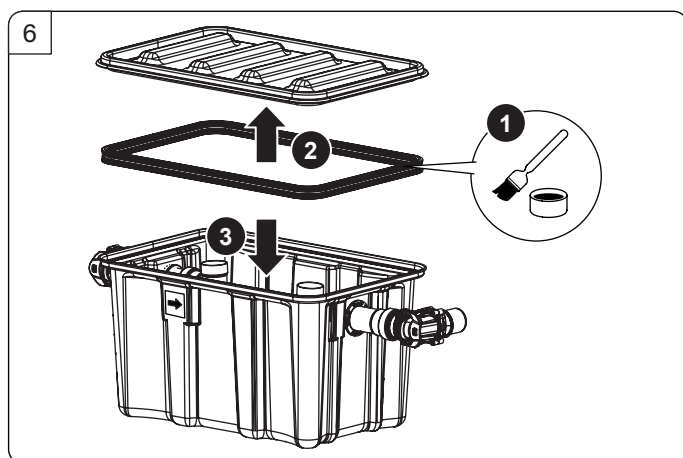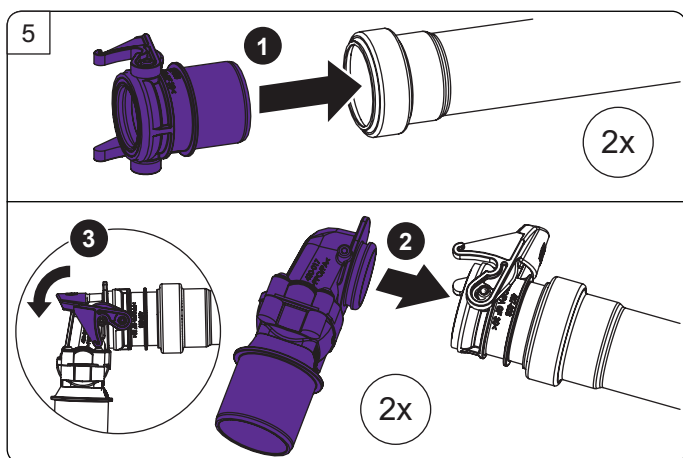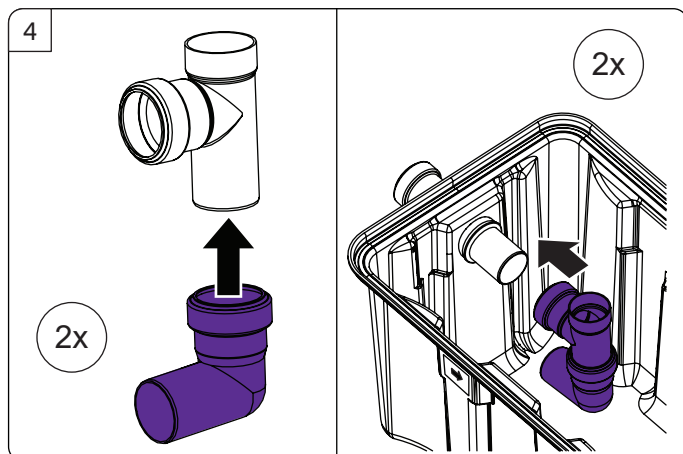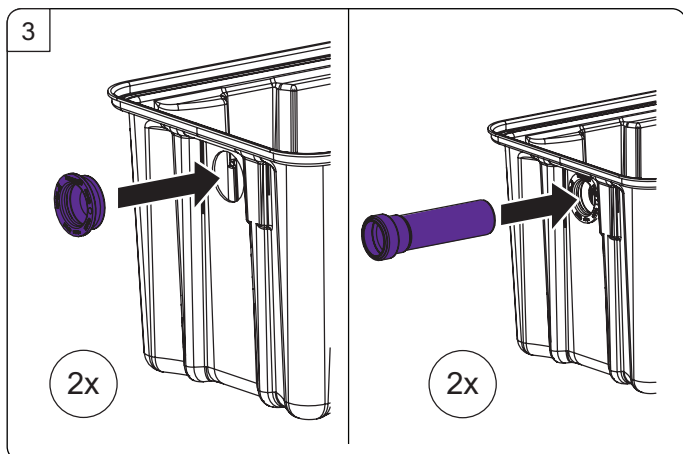

OBIO environnement
621 allée des mésanges
77190 Dammarie les Lys
Tel: 01 64 79 14 22 - Mob: 06 17 76 71 63
obio-environnement.com